
# MAGPUL® PRO NVM

**The Magpul Pro Night Vision Mount is a rigid MIL-STD 1913 rail mounting solution for the use of clip-on thermal and IR optics in conjunction with the Magpul Pro Chassis.**


⚠ ***WARNING: BEFORE STARTING, MAKE SURE THE WEAPON IS UNLOADED, THE CHAMBER IS EMPTY, AND THE SAFETY ENGAGED.***

***NOTICE: Observe safe firearm handling practices at all times. Failure to do so may result in grievous bodily injury or death. Magpul Industries shall not be responsible for injury, death or damage to property from misuse, illegal use or modification of this product.***

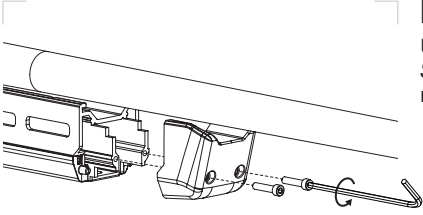


## REMOVE FOREND CAP

Using a *7/64" hex key*, loosen the two *6-32x5/8" Socket Head Cap Screws (Forend Cap Screws)* and remove the *Forend Cap*.

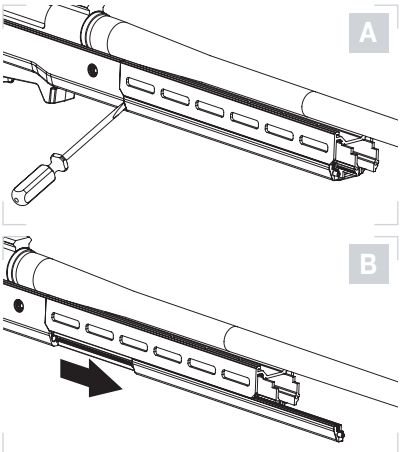


## REMOVE EDGE STRIPS

Using a thin-bladed screwdriver or similar tool, carefully insert the edge into the seam at the rear of the *Edge Strip* (A). Using your tool as a wedge, create enough space to gain purchase on the *Edge Strip* and slide it forward and off the *Chassis Forend* (B).

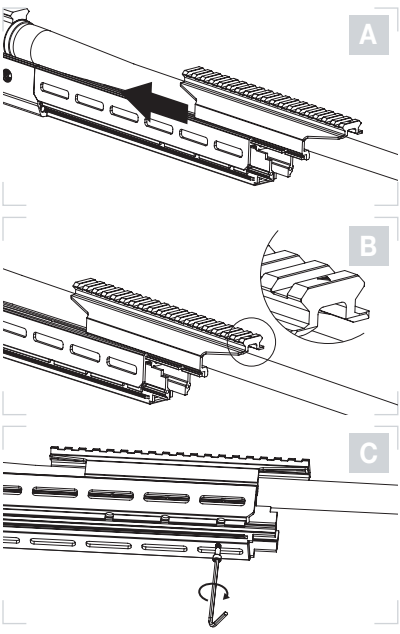



## INSTALL NV MOUNT

Slide the *alignment rails* of the *NV Mount* into the corresponding mounting grooves, from the front of the *forend* (A).


***NOTE: Ensure that the indicating arrow found on the top of the rail is pointing towards the muzzle-end of the firearm*** (B)***.***


Insert the six provided *6-32x7/16" Socket Head Cap Screws (NVM Screws)* from the bottom of the *chassis* into the six pre-drilled holes and using *7/64" hex wrench*, hand tighten to 10 in-lbs (C).

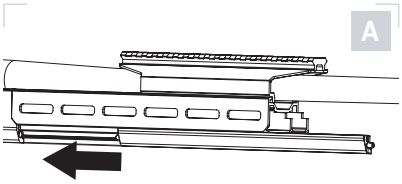


## REINSTALL THE EDGE STRIPS & FOREND CAP

Slide both *Edge Strips* into the *Edge Strip Mounting Rails* until fully seated (A). Replace the *Forend Cap*. Insert the two *Forend Cap Screws* through the *Forend Cap Mounting Holes*. Using a *7/64" hex key*, hand tighten to 10 in-lbs (B).

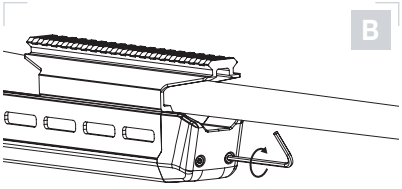
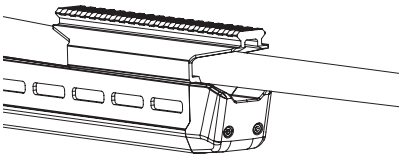
## VERIFY INSTALLATION

Perform final inspection including function test to verify correct installation.

***NOTE: Always test fire your weapon before using it in an operational environment.***

***NOTE: The Magpul® NV Mount is intended for use with clip-on devices with a center of lens position of 1.5" over the top of the rail. The NV Mount is level, without any minute-of-angle cant built into it for maximum accommodation of the most common combinations of objective diameters, receiver rails, ring heights, and clip-on devices. For correct installation of your clip-on device, please refer to the instructions provided by the manufacturer of your electro-optic.***

MAGPUL®

UNFAIR ADVANTAGE®