




X-22 BACKPACKER STOCK

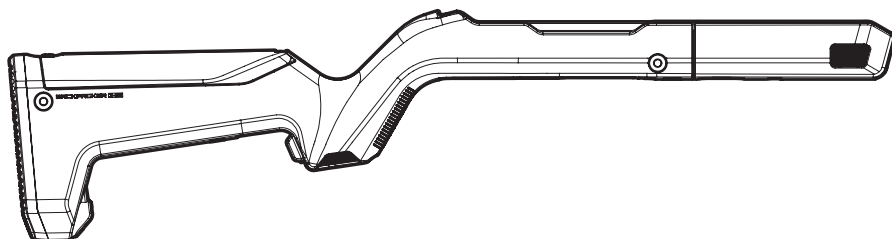


MAG808 X-22 BACKPACKER STOCK

INSTALLATION INSTRUCTIONS

⚠ WARNING: BEFORE STARTING, MAKE SURE THE WEAPON IS UNLOADED, THE CHAMBER IS EMPTY, AND THE SAFETY ENGAGED.


BARREL PROFILE



BARREL STANDOFF PLUG

The X-22 Backpacker is configurable for either standard taper barrels or 0.920" bull barrels. The stock comes preconfigured for standard taper barrels, if installation of a bull barrel is desired remove the round barrel standoff plug in the forend.


INSTALLING RECEIVER



STEP 1


Remove receiver and screws from existing stock and forend per manufacturer's instructions.

Note: Be sure safety switch is centered during removal and installation of receiver.



STEP 2


Make sure barrel and receiver are still together and locked into place. Place receiver into X-22 Backpacker Stock, install receiver screw, and tighten to 20 [in-lb] according to manufacturer's instructions.



STEP 3

Install Forend to barrel and set gap so it does not interfere with stock when "taking down" the rifle. Tighten screw to 20 [in-lb].

Note: Takedown block may need to be adjusted if desired gap isn't achievable. Please refer to manufacturer's instructions for adjustment. If you find your forend does not align well with the stock body, adjustment of the Barrel Clamp Block may be needed. See instructions below.




STEP 4

Verify Install and perform function check, including safety switch function.

Note: Upon installation, the safety switch may rotate and put the detent spring out of alignment. If necessary, rotate safety by hand to re-engage detent.




ADJUSTING FOREND ALIGNMENT, IF NEEDED




STEP 1

Separate *barrel* from *receiver* following factory instructions.




STEP 4

Separate *barrel* from *receiver* being careful not to disturb *barrel clamp block*.




STEP 2

Loosen *barrel clamp block retaining screws* and shift *clamp* to the right (looking down at the screw heads). Lightly snug *barrel clamp block retaining screws* and reinstall *barrel* being careful to not rotate too far and disturb the *barrel clamp block*.




STEP 5

Tighten *barrel clamp block retaining screws* to 20 [in-lb] according to manufacturer's instructions.



STEP 3


Carefully rotate *barrel* and *forend* until *forend* and *stock body* align.



STEP 6


Reassemble *barrel* to *receiver*. Verify install and perform function check.

STORAGE



STEP 1

Separate *barrel* from *receiver* following factory instructions.




STEP 2

Insert *barrel shank* into *barrel plug* at the toe of the *stock*, and pivot *barrel* into locked position. Ensure the *forend* locks into place and is secured by the *forend latch*. Confirm the *barrel* is secure by gently pulling the *barrel* away from the *stock*, the *barrel* should not move.


Note: Failure to confirm secure storage may result in damage of the *stock* and/or *barrel*.

DEPLOYMENT



STEP 1

Separate the *forend* from the *stock* by pressing the *release buttons* on the left and right of the *forend*, pull the *barrel* away from the *stock* and remove *barrel* from the *barrel plug*.



STEP 2

Reassemble *barrel* to *receiver*. Verify install and perform function check.



CHEEK RISER & STORAGE

CHEEK RISER STORAGE COMPARTMENT

The *Magpul X-22 Backpacker Stock* has an integrally hinged storage compartment in the cheek riser portion of the stock. To open storage compartment, slide *storage door latch* forward towards muzzle and lift up *storage door*. To close simply press down on the *storage door* until the *latch* engages on the stock.

CHEEK RISER STORAGE CAPABILITIES

The compartment is capable of storing up to (3) spare 10rd magazines, or by repositioning of the *storage divider*, (1) 10rd magazine and (1) 50rd box of ammo.

To reposition the *storage divider*, remove from the standard location and insert into the stowed position at the rear of the compartment.

"OPTIC HEIGHT" STORAGE DOOR RISER

The *Magpul X-22 Backpacker Stock* includes an "optic height" *storage door riser* which provides an additional 1/2" comb height for use of optics mounted on the receiver or the *X-22 Backpacker Optics Mount* (MAG799).

To swap out *risers* open the storage door all the way until the lug clears the slot and pull off. To install replacement *riser* simply align the *hinge lug* onto the *storage door slot* and press down until the lug pops into place. Close the storage door *riser* and ensure proper function before use.

NOTE: *X-22 Backpacker Optics Mount* (MAG799) sold separately.

GRIP STORAGE

The *Magpul X-22 Backpacker Stock* has a water-resistant storage compartment in the grip which provides additional storage for a small multitool or other survival equipment. To access the grip storage compartment, depress the *locking latch* portion of the *grip core* and remove the *grip core* from the stock. To reinstall, slide the *grip core* into the grip until the *locking latch* engages.

OPTIONAL ACCESSORIES

SLING MOUNT OPTIONS

The *X-22 Backpacker Stock* has optional QD sling mounting capability at the front and rear of the stock body. These sections will accept both *Sling Mount Kit – Type 1 & Type 2* (MAG333 & MAG332).

NOTE: *Sling Mount Kit – Type 1* (MAG333) & *Sling Mount Kit – Type 2* (MAG332) sold separately.

BUTT-PAD OPTIONS

Swapping out the standard butt pad for a *MOE SL® Enhanced Butt-pad* (MAG349) provides an additional 3/8" LOP.

NOTE: *MOE SL Enhanced Butt-pad* (MAG349) sold separately.